


# ULTRA DISTORTION UD300

2-Mode Distortion Effects Pedal

Thank you for showing your confidence in us by purchasing the BEHRINGER ULTRA DISTORTION UD300. This high-quality effects pedal delivers two distortion pedals in one—from blues-rock rhythms to searing leads. It features a mode switch that lets you choose between two different basic distortion sounds. You'll achieve the right tone for heavy metal leads, hard rock chordwork and much more.

## 1. Controls

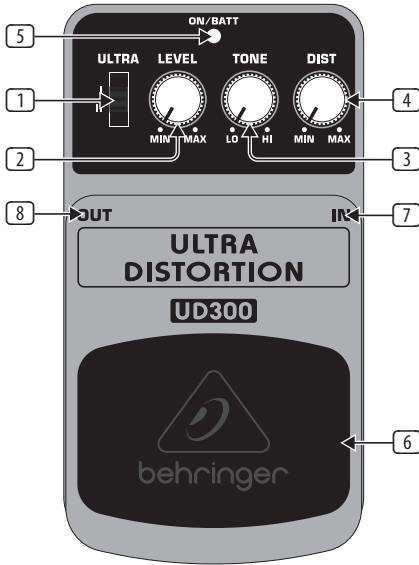

- 1 Use the **ULTRA** switch to choose between the two different distortion modes. Mode 1 provides warm and mellow distortion with flat frequency response. Mode 2 delivers biting distortion with a mid range boost that is perfect for leads.
- 2 The **LEVEL** control adjusts the output level.
- 3 The **TONE** control allows you to shape your overall sound.
- 4 The **DIST(ortion)** control adjusts the amount of distortion effect.
- 5 The **ON/BATT** LED illuminates when the effect is activated. It also serves as a battery level indicator.
- 6 Use the footswitch to activate/deactivate the effect.
- 7 Use this 1/4" TS **IN** connector to plug in the instrument cable.
- 8 The 1/4" TS **OUT** connector sends the signal to your amp.

Use the **DC IN** connection at the front of the unit to plug in a 9 V power supply (not included).

The **BATTERY COMPARTMENT** is located underneath the pedal cover. To install or replace the 9 V battery, press the hinges with a ballpen and remove the pedal cover. Be careful not to scratch the unit.

♦ **The UD300 has no on/off switch. As soon as you insert the jack into the in connector, the UD300 begins running. When not using the UD300, remove the jack from the in connector. This extends the life of the battery.**

The **SERIAL NUMBER** is located at the bottom.

## 2. Safety Instructions

Do not use near water, or install near heat sources. Use only authorized attachments/accessories. Do not service product yourself. Contact our qualified servicing personnel for servicing or repairs, especially when power supply cord or plug is damaged.

## 3. Warranty

Please register your new BEHRINGER equipment right after your purchase by visiting [behringer.com](http://behringer.com) and read the terms and conditions of our warranty carefully.

## 4. Specifications

### In

Connector	¼" TS
Impedance	500 kΩ

### Out

Connector	¼" TS
Impedance	1 kΩ

### Power Supply

9 V $\overline{-}$ , 100 mA regulated

#### BEHRINGER PSU-SB

USA/Canada	120 V~, 60 Hz
China/Korea	220 V~, 50 Hz
U.K./Australia	240 V~, 50 Hz
Europe	230 V~, 50 Hz
Japan	100 V~, 50 - 60 Hz
Power connector	2 mm DC jack, negative center
Battery	9 V type 6LR61
Power consumption	30 mA

### Physical/Weight

Dimensions (H x W x D)	approx. 2 ½ x 2 ¾ x 4 ½" approx. 54 x 70 x 123 mm
Weight	approx. 0.73 lbs / 0.33 kg

BEHRINGER is constantly striving to maintain the highest professional standards. As a result of these efforts, modifications may be made from time to time to existing products without prior notice. Specifications and appearance may therefore differ from those listed or shown.