

## PA Amplifiers

# iNUKE

## NU3000DSP

Ultra-Lightweight, High-Density  
3000-Watt Power Amplifier with  
DSP Control and USB Interface



- Delivers 2 x 1500 Watts into 2 Ohms; 2 x 900 Watts into 4 Ohms; 3000 Watts into 4 Ohms (bridge mode) and weighs less than 8 lbs / 3.5 kg
- Ultimate reliability through revolutionary cool-running High-Density Class-D technology with “near-zero” thermal buildup
- Ultra-efficient switch-mode power supply for noise-free audio, superior transient response and low power consumption
- High-performance DSP and 24-bit/96 kHz converters deliver ultimate signal integrity and extreme dynamic range
- DSP section features sophisticated delay, crossover (3 filter types, up to 48 dB/octave), EQ (8 parametric, 2 dynamic), dynamics processing and lockable security settings
- Front panel LCD display enables setup and adjustment without PC
- Can be set up, controlled and monitored via front panel USB connector. Powerful remote software downloadable at [behringer.com](http://behringer.com)
- “Zero-Attack” limiters offer maximum output level with reliable overload protection
- Built-in Subwoofer/Satellite crossover for perfect subwoofer operation
- Detented and illuminated gain controls for precise level setting
- Precise 4-segment Signal and Limit LEDs to monitor performance

The iNUKE NU3000DSP power amplifier pack 3,000 Watts (2 x 1,500 Watts @ 2 Ohms; 2 x 900 Watts @ 4 Ohms; 3,000 Watts @ 4 Ohms in Bridge mode) into exceptionally lightweight (8 lbs/3.5 kg) and rack-mountable packages. Plus, the built-in DSP and 24-bit/96 kHz converters ensure the ultimate signal integrity with an extremely broad dynamic range. And because the NU3000DSP is so much more efficient than conventional designs, it runs cooler and doesn't require the massive heat sinks and heavy toroid transformers typically associated with its conventional counterparts. Thanks to our “Zero-Attack” limiters, which offer maximum output level with exceptionally-reliable overload protection, you can run the NU3000DSP full-out for hours on-end. Our revolutionary high-density Class-D technology, combined with ultra-efficient, switch-mode power supplies, ensures this feather-light powerhouse will drive your rig effortlessly for many years to come.




## PA Amplifiers

# iNUKE

## NU3000DSP

Ultra-Lightweight, High-Density  
3000-Watt Power Amplifier with  
DSP Control and USB Interface

- XLR and ¼" TRS combination input connectors for compatibility with any source
- Professional twist-lock speaker connectors for ultimate reliability
- Independent DC, LF and thermal overload protection on each channel automatically protects amplifier and speakers without shutting down the show
- "Back-to-front" ventilation system prevents thermal buildup for reliable operation
- 3-Year Warranty Program\*
- Conceived and designed by BEHRINGER Germany

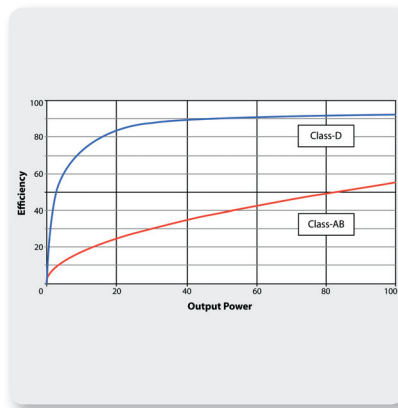

### Class-D - Massive Power, Perfect Sound

Thanks to our revolutionary Class-D amplifier technology, we are able to provide you with enormous power and incredible sonic performance in an easy-to-use, ultra-portable and lightweight package. Class-D amplification makes all the difference, offering the ultimate in energy efficiency – and eliminating the need for heavy power supplies and massive heat sinks. This amazing technology makes it possible to design and build extremely-powerful products that are significantly lighter in weight than their traditional counterparts, while using less energy and protecting the environment.

### Sublimely Simple Operation

The front panel controls and indicators provide your system's vital signs at a glance. After pressing the Power button, the Power LED lights to show the amp is ready for action. All channels feature positive-detent Gain controls with Signal LEDs that light when a signal is present, as well as Clip LEDs to indicate when the signal is distorted and you need to reduce the input signal.

Just as elegant as the front, the rear panel is home to the combo XLR and ¼" TRS Input connectors, making the iNUKE compatible with virtually any source, balanced or unbalanced. Professional twist-lock speaker sockets are provided to ensure every drop of output power gets to your loudspeakers. The rear panel is also where you'll find the switches that enable the NU3000DSP amp to run in your choice of dual mono, stereo or mono bridge modes.



## PA Amplifiers

# iNUKE NU3000DSP

Ultra-Lightweight, High-Density  
3000-Watt Power Amplifier with  
DSP Control and USB Interface



## iNUKE DSP

For sound engineers requiring high-level control capability, the NU3000DSP amplifier comes ready for action right out-of-the-box. The built-in DSP and 24-bit/96 kHz converters ensure the ultimate signal integrity with an extremely broad dynamic range. DSP functions include a sophisticated delay for delay-line loudspeakers, crossover, EQ (8 parametric, 2 dynamic), and dynamics processing with lockable security settings. A convenient front panel LCD display allows you to setup and make adjustments directly at the amplifier, without the need for a PC.

## Editor Software

NU3000DSP amplifiers can also be set up, controlled and monitored directly via the front panel, or you can connect a computer via USB – and immediately gain access to a whole new level of amplifier control. iNUKE Remote Connect software is the ideal way to manage installed systems, and to set up presets for live sound and production environments.

Click to download the iNuke [Remote Connect](#) software.



## Sound Value

Sporting massive output ratings, built-in DSP and 24-bit/96 kHz converters, lightweight Class-D technology and an equally lightweight price tag – plus all the amenities a professional audio engineer could ask for – the iNUKE NU3000DSP power amplifier is a serious amp for your most demanding applications.

Experience the iNUKE NU3000DSP amplifier at your local dealer today, and find out why more and more professionals are turning to [BEHRINGER](#) amplifiers for their superb performance and extraordinary value.

PA Amplifiers

# iNUKE NU3000DSP

Ultra-Lightweight, High-Density  
3000-Watt Power Amplifier with  
DSP Control and USB Interface

## You Are Covered


We always strive to provide the best possible Customer Experience. Our products are made in our own **MUSIC Group** factory using state-of-the-art automation, enhanced production workflows and quality assurance labs with the most sophisticated test equipment available in the world. As a result, we have one of the lowest product failure rates in the industry, and we confidently back it up with a generous **3-Year Warranty** program.



PA Amplifiers

# iNUKE NU3000DSP

Ultra-Lightweight, High-Density  
3000-Watt Power Amplifier with  
DSP Control and USB Interface

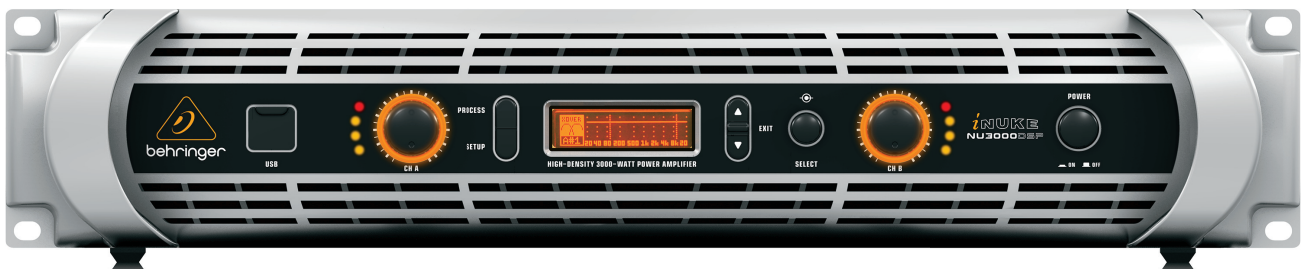

PA Amplifiers

# iNUKE NU3000DSP

Ultra-Lightweight, High-Density  
3000-Watt Power Amplifier with  
DSP Control and USB Interface



For service, support or more information contact the BEHRINGER location nearest you:

**Europe**  
**MUSIC Group Services UK**  
Tel: +44 156 273 2290  
Email: CARE@music-group.com

**USA/Canada**  
**MUSIC Group Services NV Inc.**  
Tel: +1 702 800 8290  
Email: CARE@music-group.com

**Japan**  
**MUSIC Group Services JP K.K.**  
Tel: +81 3 6231 0454  
Email: CARE@music-group.com

MUSIC Group accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph, or statement contained herein. Technical specifications, appearances and other information are subject to change without notice. All trademarks are the property of their respective owners. MIDAS, KLARK TEKNIK, LAB GRUPPEN, LAKE, TANNÖY, TURBOSOUND, TC ELECTRONIC, TC HELICON, BEHRINGER, BUGERA and DDA are trademarks or registered trademarks of MUSIC Group IP Ltd.  
© MUSIC Group IP Ltd. 2016 All rights reserved.

