BP-1 PAD CONTROLLER INSTRUCTIONS

The BOSS Pad Controller BP-1 can be connected with the BOSS Sampler/Delay RSD-10 or a drum sound module to play them. Also, the BP-1 can be used as an external pad of the Roland Octapad PAD-8.


The BP-1 features the Sens Knob that controls the output voltage, therefore, can be used with almost all types of devices that have Pad Input Jacks.

Using the optional Pad Holder BPH-2, two sets of the BP-1's can be set up as one, and this can be installed to a tom stand, etc.

* When using the BP-1 with the DSD-2 (BOSS Compace Series), connect the BP-1 to the Trigger Input of the DSD-2, set the Sens Knob on the BP-1 to its maximum position, and hit the pad rather hard.

Please read these instructions carefully for proper operating procedures for the BOSS BP-1


NAMES AND FUNCTIONS

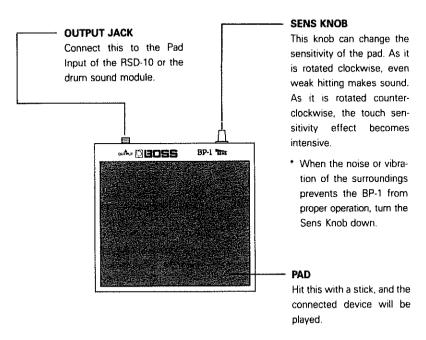

[CAUTION]

No further hitting power needs to be hitted. This BP-1 has a sensor providing a great sensitivity.

An excessive hitting power can cause intermittent operation.

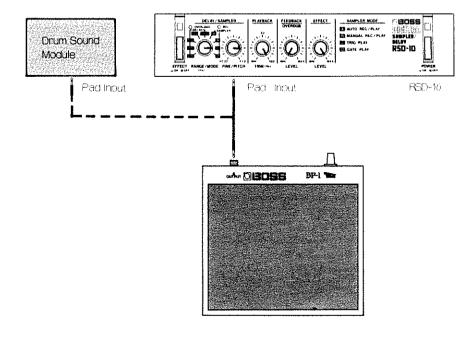

SPECIFICATIONS

Pad

Output Jack

Sens knob

Output Impedance 100kΩ

x 58 (H) mm

6" x 5-11/16" x 2-5/16"

Weight 730g/1 lb. 10 oz. **OPTIONS** Pad Holder BPH-2

IMPORTANT NOTES

- Please never disassemble the BP-1 even when it breaks down.
- Avoid using the BP-1 in extreme heat, humidity or where it may be affected by dust.
- Clean with a soft cloth, and never use solvents such as thinner



Printed in Japan Jan. '86 E-3

Roland® 10400

UPC 10400

