

ISTRUCTIONS

• Please read these instructions carefully for proper operating procedures for the BOSS KM-04.

■THE CONTROLS:

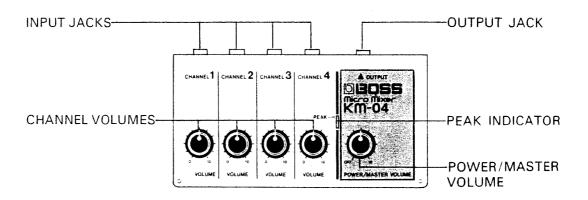

CONNECTING

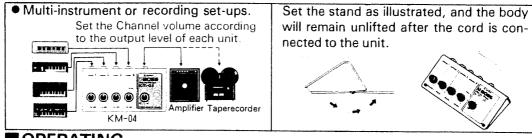

OPERATING




After connecting all the cords required, set all the Channel volumes to '0' and Power/Master Volume to 'OFF'.



- 2. Set Power/Master Volume to 5.
- 3. Turn on the Power Switch of the connected units (amplifier, taperecorder, etc.)
- Turn off Power/Master Volume when the unit is not in use.



Set Channel volume to proper position. (Set the channel to '0' when it is not used.)



- When LED Peak indicator lights up, which means the sound is distorted, turn down each Channel volume. If the sound is destorted without Peak indicator lighting up, decrease total volume by turning down Master Volume.
- Avoid using the unit in the place of dust, humidity and heat.

SPECIFICATIONS

Input impedance.... Over $22 k\Omega$ Input sensivity..... 190 mV (RMS) Load impedance Over 10 k Ω

Output level..... Max. 2.1 V (RMS)

Controls......Power/Master Volume x 1

Channel volume × 4

Jacks Input × 4

Output × 1

Peak indicator 1

Power consumption..1mA (LED OFF)

Dimensions 145(W) \times 150(D) \times 47(H) mm

Weight.....350 g

*Specifications are subject to change without notice.



Products of Roland

KM-04 INSTRUCTIONS '81 Dec. E-3

Roland® 17047231

UPC 17047231

