




Km-400

Keyboard Mixer

INSTRUCTIONS

Please read these instructions carefully for proper operating procedures for the BOSS KM-400.

■ THE CONTROLS

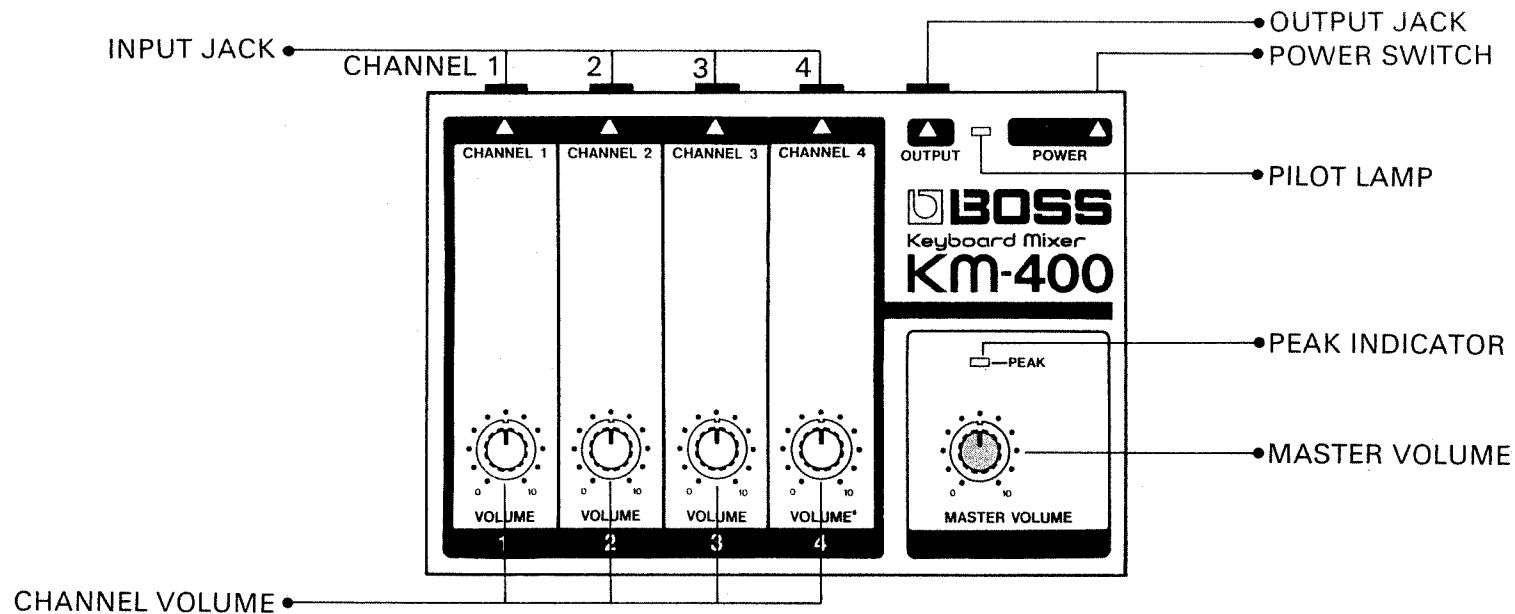

■ SPECIFICATIONS

Input impedance: Over 22k Ω
 Input level: 260mV(RMS)
 Load impedance: Over 10k Ω
 Output level: Max.3V(RMS)


Controls Channel volume 4
 Master volume 1
 Power switch 1

Jacks: Input..... 4
 Output..... 1


Peak indicator: 1
 Power consumption: 1W
 Dimensions: 220(W) x 150(D) x 65(H)mm
 Weight: 1.4kg
 * Specifications are subject to change without notice.

■ CONECTING KM-400

● Multi-instrument set-ups

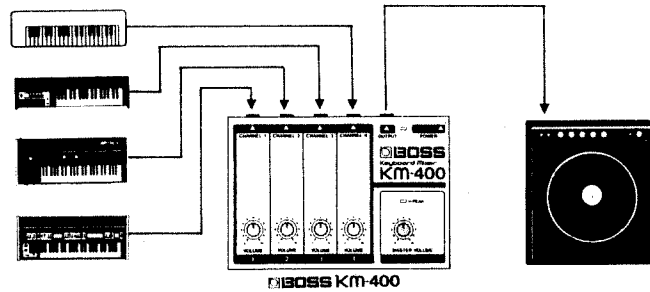

● To recording

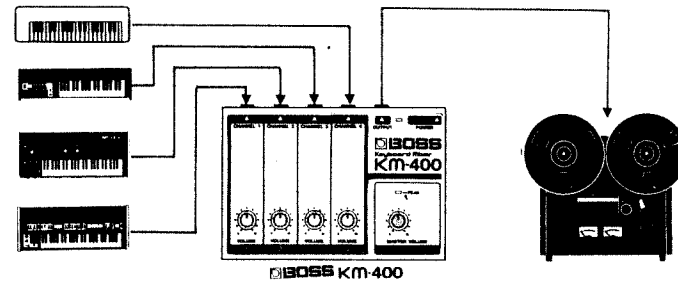

■ OPERATING KM-400

	<p>1. After connecting all cords required, set all knobs on the panel to (0).</p>		<p>3. Set Power switch to ON, and Pilot lamp will light up.</p>		<p>5. Set Channel volume to proper position.</p>
	<p>2. Make sure that Power switch is set to OFF, and plug power cord into outlet.</p>	<p>MASTER VOLUME</p>	<p>4. Set Master volume to "5".</p>		<p>6. When LED Peak indicator lights up, which displays that the signal is distorted. In this case, decrease the volume level for each channel. Also, if the signal is distorted without lighting up (LED Peak Indicator), decrease total volume level by Master volume.</p>

 Roland®

10178

UPC

10178



10981

 **BOSS**
Products of Roland

KM-400 INSTRUCTIONS '81 Jun.B-3