

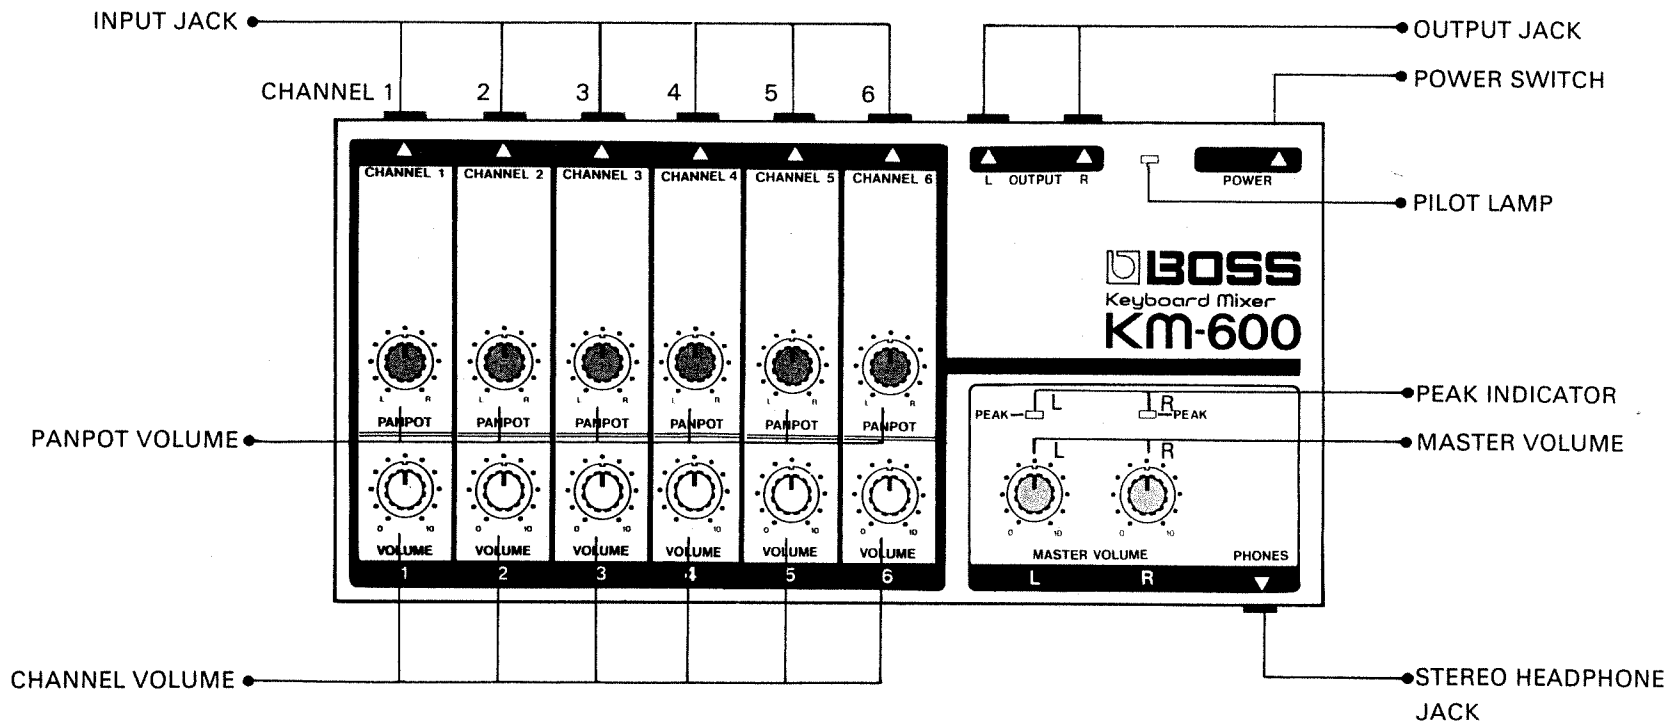
Km-600

Keyboard Mixer

INSTRUCTIONS


Please read these instructions carefully for proper operating procedures for the BOSS KM-600.

THE CONTROLS




■ CONECTING KM-600

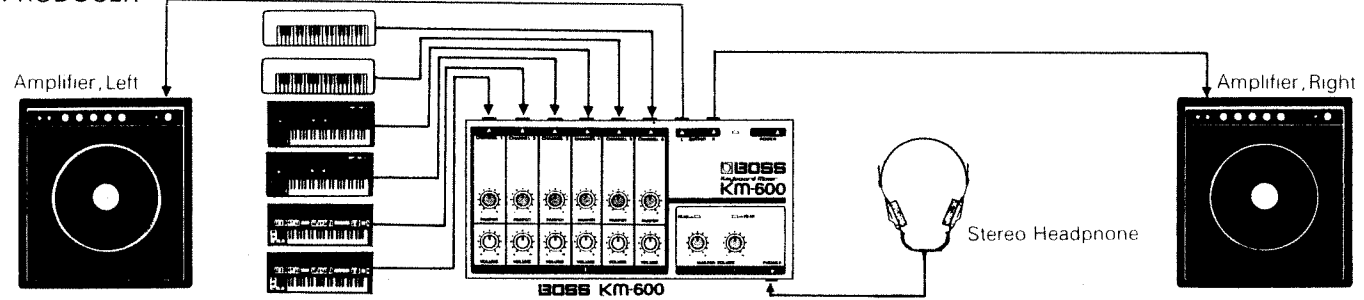● TO STEREO SOUND PRODUCER




● TO GRAPHIC EQUALIZER








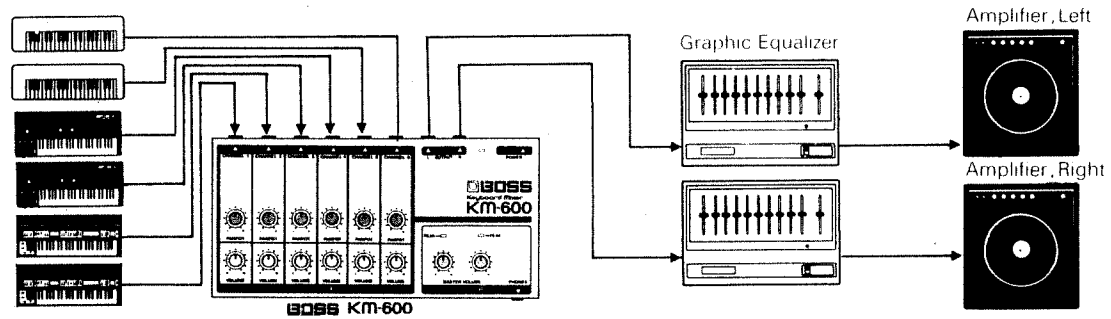
For stereophonic application, use two graphic equalizers (BOSS GE-10).



● TO RECORDING

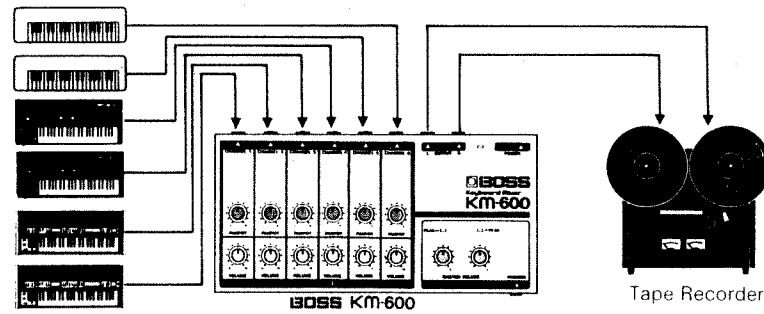


■ OPERATING KM-600

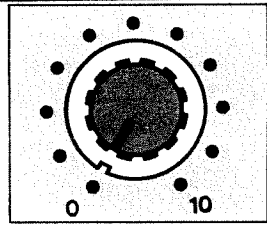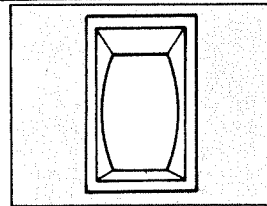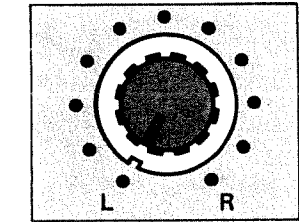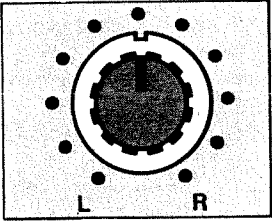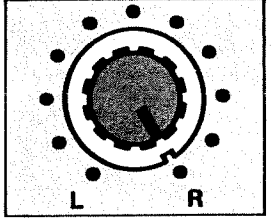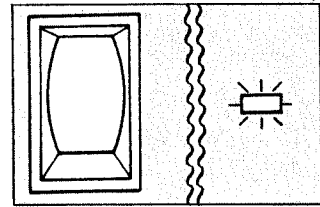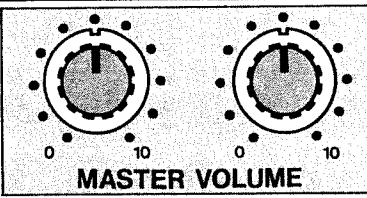	<p>1. After connecting all cords required, set all knobs on the panel to (0).</p>	<p>4. Set Panpot volume to proper position to obtain maximal mixing results.</p>		
	<p>2. Make sure that Power switch is to set OFF, and plug power cord into outlet.</p>	 <p>▲ To L for sound from left channel only.</p>	 <p>▲ To CENTER for sound from both channel outputs.</p>	 <p>▲ To R for sound from right channel only.</p>
	<p>3. Set Power switch to ON, and Pilot lamp will light up.</p>	 <p>MASTER VOLUME</p>	<p>5. Set both L and R Master volume to "5".</p> <p>* Phones out ; You can monitor by headphone without reference to the position of Master volume.</p>	
	<p>6. Set Channel volume to proper position.</p> <p>* When connecting three or more instruments, adjust each channel volume to proper position and then readjust R and L Master volume.</p> <p>* Channel volume not in use should be set to "0".</p> <p>7. When LED Peak indicator lights up, which displays that the signal is distorted. In this case, decrease the volume level for each channel. Also, if the signal is distorted without lighting up (LED Peak indicator), decrease total volume level by Master volume.</p>			

 Roland®

10179

UPC 10179



10981

 **BOSS**
Products of Roland

KM-600 INSTRUCTIONS '81 Jun. B-3