



Technics


KEYBQARD



sx-KN200 sx-KN400 sx-KN220 sx-KN440











Vol. 3

VOL. 3

PRACTICAL APPLICATIONS

This volume comprises a detailed explanation of **SEQUENCER**, **COMPOSER**, Function Setting and MIDI.

Read the parts which are relevant to the functions you wish to use.

APPLICATIONS PRATIQUES

Ce tome comprend les explications détaillées sur **SEQUENCER**, **COMPOSER**, réglage des fonctions et MIDI.

Lisez les articles concernant les fonctions que vous souhaitez utiliser.

APLICACIONES PRACTICAS

Este tomo consta de una explicación detallada del **SEQUENCER**, **COMPOSER**, Ajuste de las funciones y MIDI.

Lea las partes relacionadas a las funciones que desea utilizar.

應用篇

在VOL. 3對於**SEQUENCER**(程序處理)程**COMPOSER** (編輯器)的應用功能、設定方法以及MIDI的應用操作加以詳細說明。如欲利用上述功能時,請翻閱本篇,則善於應用豐富的技巧。


Contents

Part III	Recording and playback
Seq	uencer
•	Let's store the following music
•	Playing back the recorded performance6
	Advanced applications
•	Storing two or more parts at the same time
	Storing a chord progression8
•	Storing rhythm changes
•	An example of storing in the Sequencer 11
Con	າposer (KN400)14
	Create an accompaniment pattern 15
	Editing a preset rhythm pattern 20
•	Play back the stored pattern 21
Part IV	Function setting mode
	ing the functions
•	Tuning 23
•	Tuning
•	PANEL MEMORY expanded mode (KN400) 23 Assigning a function to the foot switch 24
•	PANEL MEMORY expanded mode (KN400) 23
•	PANEL MEMORY expanded mode (KN400) 23 Assigning a function to the foot switch 24
•	PANEL MEMORY expanded mode (KN400) 23 Assigning a function to the foot switch
• • • • Part V	PANEL MEMORY expanded mode (KN400) 23 Assigning a function to the foot switch
Part V	PANEL MEMORY expanded mode (KN400) 23 Assigning a function to the foot switch
Part V	PANEL MEMORY expanded mode (KN400)
Part V	PANEL MEMORY expanded mode (KN400) 23 Assigning a function to the foot switch 24 Modulation depth 25 Initializing the function settings 26 MIDI 27 What is MIDI? 27

Sequencer

The **SEQUENCER** stores your entire performance—melody and accompaniment, sound and panel setting changes, even changes in the rhythm—for completely automatic playback whenever you desire.

The performance can be stored part by part: POLY (KN200), POLY 1, 2 (KN400) and AC-COMP/CHORD.



KN200

KN400

SEQUENCER						
	STEP		ACCOMP/			
RECORD	RECORD	POLY	CHORD			
0	0	0	0			

SEQUENCER					
	STEP			ACCOMP/	
RECORD	RECORD	POLY 1	POLY 2	CHORD	
0	0	0	0	0	

■ Data which can be stored in each track

When all the tracks are set to the recording mode, all the panel settings (except for **TEMPO**) are automatically stored at the beginning of the song. In addition, the following data is stored during recording.

Part	What you can store			
POLY (KN200) POLY 1 (KN400) POLY 2 (KN400)	RHYTHM START/STOP, FILL IN, INTRO & ENDING, performance data, and changes in the SOUND SELECT settings, **BALANCE settings, EFFECT settings, PITCH BEND/MODULATION data (KN400), glide on/off data (except POLY 2).			
*ACCOMP/CHORD	RHYTHM START/STOP, FILL IN, INTRO & ENDING, performance data, ACCOMP PART status, AUTO PLAY CHORD, and changes in the tempo setting, **BALANCE settings (DRUMS, BASS & ACCOMP), RHYTHM SELECT settings, PITCH BEND/MODULATION data (KN400), the PANEL MEMORY status, and TRANSPOSE status			

^{*}For the ACCOMP/CHORD part, in addition to the performance you actually play and record in real-time, you can also use the STEP RECORD function to record the chord progression step by step.

^{**}SUB BALANCE setting are not stored.

Let's store the following music.

Registration: POLY (1)....... SPECIAL 6

RHYTHM.....8 BEAT 2


AUTO PLAY CHORDFINGERED on

SYNCHRO & BREAKon

POLY (1) track

ACCOMP/CHORD track (AUTO PLAY CHORD)



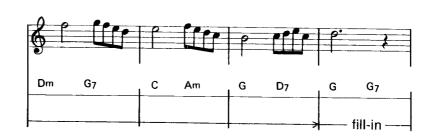

Storing each part (multi-track storage)

- 1. Set the sound, rhythm, AUTO PLAY CHORD, etc. before starting to play.
- If you wish to insert an intro, press the INTRO
 & ENDING button to turn it on.
- 2. Press the **RECORD** button in the **SEQUEN- CER** section. Its indicator lights.



 Press the SEQUENCER button for the part you wish to store first (for example, the AC-COMP/CHORD button). The indicator for the part flashes slowly.



4. Now play the part: Play the C chord on the left keyboard to begin recording.

Þ

- · Listen to the intro which plays for 4 measures.
- When the rhythm is not used, do not start the rhythm. The rhythm can be started and stopped any time during the performance, as desired.
- When you have finished playing the part, press the RECORD button to turn it off.



- · If the rhythm is on, it will stop automatically.
- At this time, confirm that the indicator for the part already stored is still lit.
- 6. Press the **RECORD** button. Its indicator lights.
- 7. Press the **SEQUENCER** button for the next part to be stored (for example, **POLY** (1)). The indicator of the selected part will flash slowly.
- Confirm that the indicator for the part you selected in step 3 is lit.

- 8. Press the **START/STOP** button. The part(s) already stored will be played, and you can play in time with it to store the next part.
- Use the START/STOP button to start playback of the already-stored part(s), even for a song which has no rhythm.



- If you wish to end a part before the end of the song, you do not have to wait until the entire song has been played back. You can press the button to record the next part at any time, but in this case, do not stop the rhythm.
- When you have finished storing all the parts, press the RECORD button again to turn it off.



Playing back the recorded performance

1. Press to turn on the **SEQUENCER** button(s) for the parts of the performance you wish to have played back.

KN200		
	SEQUENCER ———	
	RECORD RECORD POLY CHORD O O O	
KN400		
	SEQUENCER	_
	STEP ACCOMP	/
	RECORD RECORD POLY1 POLY2 CHORD	
	0 0 0 0	

- Make sure that only the SEQUENCER indicators for the parts you wish to have played back are lit. (If the SEQUENCER indicator for another part is turned on, the wrong melody may be played or the rhythm may stop during the performance.)
- 2. Press the SEQUENCER RESET button.



3. Press the **START/STOP** button to begin the automatic playback.



- Use the START/STOP button to start playback even if the song has no rhythm.
- If the START/STOP button is pressed during automatic playback of the recorded performance, playback will stop. If the START/STOP button is pressed again, playback will continue from the point at which it stopped. Note, however, that if the rhythm was stored with the song, the rhythm does not start in this case.

SEQUENCER RESET

FILL IN (SEQUENCER RESET)



When the **START/STOP** button is off, by pressing the **SEQUENCER RESET** button for 1~2 seconds, the indicators for the parts which have been stored turn on and the panel settings change to the settings at the beginning of the stored performance.

 If the START/STOP button is pressed during automatic playback of a performance, to return to the beginning of the performance, press the SEQUENCER RESET button.

Advanced applications

Storage capacity

Expressed in terms of notes, the total storage capacity of the **SEQUENCER** is approximately 1600 notes.

 Data such as sound changes etc. can be stored for each part, but will reduce the storage capacity accordingly. How to count the number of notes
 The cycle of one key being pressed and

The cycle of one key being pressed and released is counted as one note.

- When the remaining storage capacity becomes 20% or less, it is shown as a percentage (%) on the display.
- When "0" is shown on the display and the "beep, beep, beep" error message sounds, no more data can be stored in the SEQUENCER.
- The tempo can be freely adjusted during playback. Therefore, you may record the performance by playing the keyboard slowly.
- If new songs are stored over songs already stored, the previously stored songs are erased.

Storing two or more parts at the same time

By setting up the **SEQUENCER** to record multiple tracks, you can perform and record multiple parts at one time.


(KN400)

SEQUENCER					
RECORD	STEP RECORD	DOLV1	POLY 2	ACCOMP/ CHORD	
C	NECOND	0	0	CHORD	
\sim					
			()	()	

- 1. Set the beginning sounds and effects before starting to play.
- 2. Press the **RECORD** button in the **SEQUEN- CER** section. Its indicator lights.

RECORL
0

3. Press the **SEQUENCER** buttons for the parts you wish to store. The indicators flash slowly. (KN400)



4. Play.




- Keyboard sounds are produced according to the CONDUCTOR settings.
- KN400: When storing the POLY 1 or POLY 2 part, select the respective part on the CON-DUCTOR before selecting the sound.
- When recording the ACCOMP/CHORD track during multiple-track recording, be sure to turn on the ONE-FINGER or FINGERED button of the AUTO PLAY CHORD before storing chords.
- KN400: When recording both the POLY 2 and ACCOMP/CHORD tracks, turn off the AC-COMP PART 2 and 3 buttons.
- 5. When you have finished playing, press the **RECORD** button to turn it off.



Storing a chord progression

The ACCOMP/CHORD part can be stored using the STEP RECORD function of the SEQUENCER.

In addition to the **SEQUENCER** buttons, the nine keys indicated on the right part of the keyboard are used for storing with the **STEP RECORD** method.

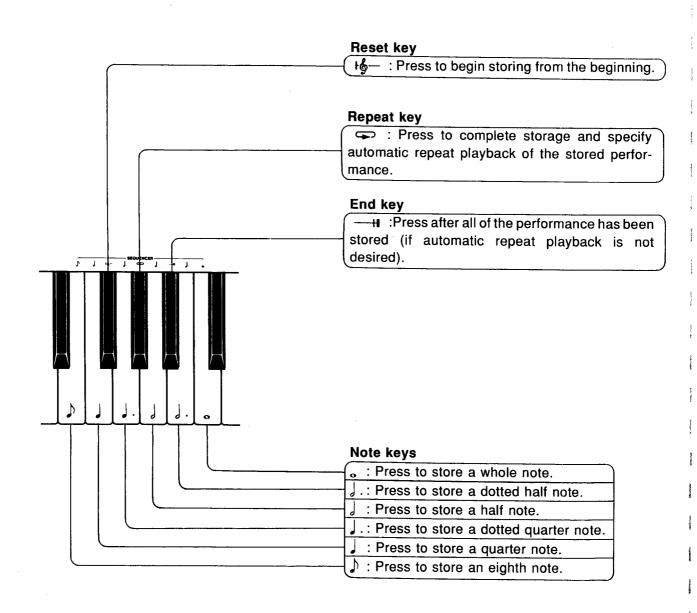

ACCOMP/CHORD

Chord progressions and changes in the sounds, effects and rhythm can all be stored in the AC-COMP/CHORD part.

Store the following example:




- 1. Set up the panel with a rhythm, sounds and effects which fit the tune.
- Press the STEP RECORD button of the SE-QUENCER section. Its indicator lights.



- If the AUTO PLAY CHORD function was not activated, the mode now changes automatically to the FINGERED mode of the AUTO PLAY CHORD.
- The ACCOMP/CHORD indicator flashes slowly.
- 3. Store one measure of a C chord.

Specify the chord Specify the note unit

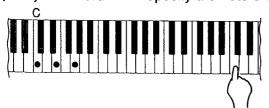

While holding down a C chord on the left part of the keyboard, press the • key to specify a whole note (one measure of C chord).

- A "beep" will sound to indicate that the chord has been stored.
- If, while holding down a C chord, the key is pressed two times, the C chord will be stored for two measures.

- 4. Store one measure of an F chord. While holding down an F chord on the left part of the keyboard, press the ♠ key to specify a whole note (one measure of an F chord).
- 5. In the same way, store one measure of a G chord and one measure of a C chord.
- If you want the sequence to be repeated automatically, instead of the —II key, press the key. (In the case of a 3-beat rhythm, if an intro is used or if the number of measures is an odd number, the timing will be off.)
- To store the sequence again (redo) from the beginning, press the reset key by— and begin storing again from step 3.

Automatic playback of the stored chord sequence

1. Turn on the ACCOMP/CHORD button.



Select a rhythm and press the START/STOP button to start the rhythm. The stored chord sequence is automatically played back.

STAR	T/STOF O

2. Press the SEQUENCER RESET button.

Storing rhythm changes

In addition to chord progressions, you can also store changes in the rhythm by using the STEP RECORD function.

- Storing the beginning panel settings
- 1. Select the sounds, effects and rhythm on the panel.
- 2. Press the STEP RECORD button to turn it on.



- · Its indicator flashes.
- The beginning panel settings (except for TEMPO) are stored.
- 3. Store the chords.
- Storing an intro
- 1. Press the STEP RECORD button to turn it on.



2. Press the **INTRO & ENDING** button to turn it on.



- 3. Store the chords.
- During playback, after the DRUMS intro pattern is played, the ACCOMP and BASS rhythm patterns are added.
- If you wish the intro to include the ACCOMP and BASS patterns, first turn on the STEP RECORD button, then, while holding down a chord on the keyboard, turn on the INTRO & ENDING button.

- Storing a rhythm change in the middle of the tune
- 1. Store the chord progression up to the point where the rhythm changes.
- 2. Select a different rhythm.
- A "beep" will sound to indicate that the change has been stored.
- 3. Continue storing the chord progression.
- Storing a fill-in



To store a drums-only fill-in pattern, press the **FILL IN** button, then use the note unit keys to specify the number of notes in the fill-in.

To store a fill-in played as part of the accompaniment pattern, press the **FILL IN** button, then store a chord.

■ Storing an ending



If the INTRO & ENDING button is pressed at the end of the tune, an ending pattern is stored and the STEP RECORD button turns off.

SOLING.

1

Ī

If the **INTRO & ENDING** button is pressed while the keys for a chord are pressed, the ending will be played as part of the accompaniment pattern.


■ Storing a 3-beat rhythm

When storing chords for a 3-beat rhythm such as the WALTZ or JAZZ WALTZ, specify the note units for one measure of a chord as ...

■ Storing sound changes in the middle of the tune (KN400)

Changes in the **PANEL MEMORY** selection can be stored in the **SEQUENCER**.

- Store the chord progression up to the point where the PANEL MEMORY selection changes.
- 2. Press one of the PANEL MEMORY 1~4 buttons.




- A "beep" will sound to indicate that the change has been stored.
- 3. Continue storing the chord progression.

An example of storing in the Sequencer

What to store

RHYTHM			FUNK				16	BEAT		
FILL IN, INTRO, ENDING	INTRO		·		FILL IN					ENDING
Chord		С	F	С	G ₇	Em	A ₇	Dm G ₇	С	С

How to store

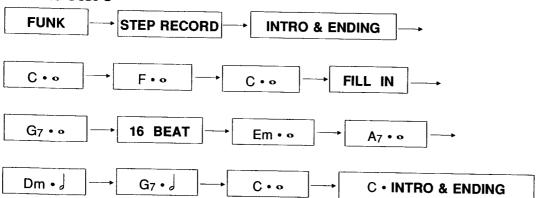

To clear specific parts or the entire performance

[KN200]

Press the **PLAY** button to turn it off (**STANDBY**). The entire contents of the **SEQUENCER** are erased.



[KN400]

The **SEQUENCER** contents remain in the memory for about one week after the **POWER** button is turned off.



■ To clear the entire contents of the SEQUEN-CER

While pressing the **RECORD** button in the **SE-QUENCER** section, turn the **POWER** button on. The indicators for all the **SEQUENCER** parts flash.

■ To clear specific parts of the SEQUENCER While pressing the button for the SEQUENCER part you wish to clear (for example, POLY 2), turn the POWER button on. The indicator for the specified part flashes.

SEQUENCER						
RECORD	STEP RECORD	POLY 1	POLY 2	ACCOMP/ CHORD		
0	0	0	0	0		

About the maximum number of notes which can sound from the SEQUENCER parts

The maximum number of notes which can be recorded in or played back from each track of the **SEQUENCER** changes depending on the status of the **AUTO PLAY CHORD** and **ACCOMP PART** (KN400).

In general, the number of notes can be calculated as follows.

When recording/playing back only one track

■ KN200

POLY track 11 notes

ACCOMP/CHORD track 4 notes

■ KN400

POLY 1 track.... 11 notes

POLY 2 track.... 11 notes

ACCOMP/CHORD track.....4 notes

When recording/playing back both the POLY 1 and POLY 2 tracks (KN400)

POLY 1 track....7 notes

POLY 2 track.... 4 notes

 Even when the ONE-FINGER or FINGERED button of the AUTO PLAY CHORD is on, and the ACCOMP PART 2 and 3 buttons are on, the notes stored in or played back from the POLY 2 part of the SEQUENCER have priority. When recording/playing back the POLY track while playing the ACCOMP/CHORD track

■ KN200

POLY track......4 notes

■ KN400

With ACCOMP PART 2 and 3 on

POLY 1 track 4 notes

POLY 2 track(Not available for recording/ playback)*

*The ACCOMP/CHORD track recording/play-back has priority over POLY 2 track recording/playback.

With ACCOMP PART 2 and 3 off

POLY 1 track	POLY 2 track		
7 notes			
	3 notes		
4 notes	3 notes		

Please note that these are general rules and that the exact number of notes recorded in or played back from each part may differ depending on the selected sound or settings.

Composer (KN400)

With the **COMPOSER** you can create original rhythms, or you can edit preset rhythms as desired. Then store up to four of your creations in the **COMP 1~4** buttons for instant recall.

In the COMPOSER section, the five parts comprising the rhythm—DRUMS, BASS and ACCOMP 1, 2, 3—are selected with the RECORD button and added one at a time.


Although you may choose to store only one or two parts in the COMPOSER, the BASS and ACCOMP 1, 2, 3 parts should be stored if using the AUTO PLAY CHORD feature.

Here is what the parts of the **COMPOSER** do:

RECORD: Press this button and the part indicated on the display is available for storing. Each time the button is pressed, the part available for storing changes.

INSTR ERASE: Use this button to delete the pattern of a specific instrument from the **DRUMS** part.

CLEAR: When this button is pressed, the contents of the part indicated on the display are cleared.



COMPOSER							
QUANTIZE O J ₃	BEAT 3/4	CLEAR	INSTR ERASE	RECORD			
40	0	0	0	0			

RHYTHM SELECT							
COMP 1 O	LATIN 2	LATIN 1	TANGO	WALTZ	COUNTRY	MARCH 2	MARCH 1
COMP 2	BOSSA- NOVA	SAMBA	JAZZ WALTZ	DIXIE	JAZZ COMBO 2	JAZZ COMBO 1	IG BAND
COMP 3 O	LATIN ROCK 2	LATIN ROCK 1	ROCK BALLAD	SHUFFLE	ROCK'N' ROLL	8 BEAT 2	BEAT 1
COMP 4°	DISCO2	DISCO 1	SWING ROCK	FUNK	JAZZ ROCK	16 BEAT 2	6 BEAT 1
O · VARIATION	0	0	0	0	0	0	0
				\bigcirc	\bigcirc		\bigcirc

BEAT: Press this button to specify 3/4 time. When it is off, the time signature is 4/4 time.

QUANTIZE: By turning on this function before recording, the timing of the recorded performance is automatically "evened out."

COMP 1~4: Store four of your original patterns in these buttons for instant recall.

Create an accompaniment pattern.

A repeating two-measure pattern is stored by playing in real-time on the keyboard.

I. Setting up to store the rhythm pattern

1. Press the **RECORD** button in the **COMPOSER** section. The **COMP** 1~4 indicators flash.

O

 Press one of the COMP 1~4 buttons in which you will store your new rhythm pattern. The indicator for the selected button lights.
 A L L " appears on the display.

COMP 3 COMP 4 CO

When creating a new rhythm pattern, all parts of a previously stored rhythm in the selected number button can now be deleted by pressing the CLEAR button.

> CLEAR O

4. To record a pattern in 3/4 time, press the **BEAT** button to turn it on.

BEAT 3/4 O

5. To use the quantize function, use the QUANTIZE button to select \int_a^b or A. (Refer to page 19.)


O ♪3
O ♪

II. Storing the DRUMS part


- Press the RECORD button in the COMPOSER section. " d r " appears on the display. The metronome starts. (If the DRUMS part has not been cleared, any previously stored DRUMS rhythm can also be heard.)
- Any contents stored in the DRUMS part can be deleted by pressing the CLEAR button.



Play the desired percussive keys on the keyboard in time with the metronome for two measures.

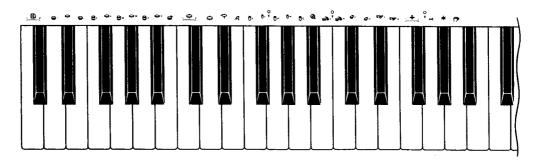


 You can distinguish the 1st measure from the 2nd measure by the horizontal lines on the display.



- If you press a percussive key while pressing the INSTR ERASE button, that instrument will be deleted for as long as the INSTR ERASE button is pressed.
- Up to four instruments can sound with the same timing. However, if the MANUAL PERCUS-SION is played with the COMPOSER during playback, the number of DRUMS instruments that sound becomes less.
- · Adjust the tempo as necessary.
- If either QUANTIZE level is selected during recording, any unevenness in the timing of the performance is smoothed out. The default setting is ... (Refer to page 19.)

Store the following example:

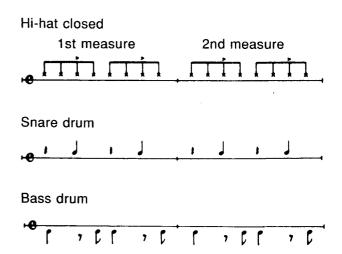


III. Storing the BASS part

 Press the RECORD button in the COMPOSER section. The display changes to show " b A S". In addition to the metronome and the DRUMS pattern just stored, any previously stored BASS and ACCOMP patterns now sound.





- If you wish to delete all the previously stored BASS part, press the CLEAR button.
- Use the 16 buttons in the horizontal row of the SOUND SELECT matrix to select the BASS sound.

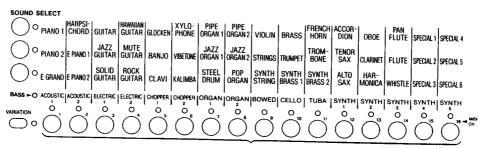


Select the **BASS** sound (indicated in the bottom row) with these buttons.

3. Play two measures of the **BASS** pattern on the keyboard.

Þ

- Record the performance in C major for correct chord progressions during playback.
- The BASS pattern can be played on the entire keyboard, regardless of the indicated split point. However, those notes played on C4 or higher will sound in a lower octave.
- Play the BASS pattern for two measures to store it. Then, as the two-measure pattern is repeated, you can play the keyboard to add notes to the pattern. The final version of the BASS pattern is the one that is stored.
- Adjust the tempo as necessary.

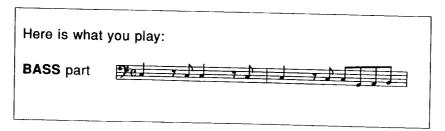


IV. Storing the ACCOMP 1 part

 Press the RECORD button in the COMPOSER section. The display changes to show "A C 1". In addition to the patterns stored for the DRUMS and BASS parts, any previously stored ACCOMP 1 pattern now sounds.






- If you wish to delete all the previously stored
 ACCOMP 1 part, press the CLEAR button.
- Select the ACCOMP 1 sound with the buttons in the SOUND SELECT matrix. Select any of the preset sounds by pressing one of the 3 vertical row buttons and one of the 16 horizontal row buttons.

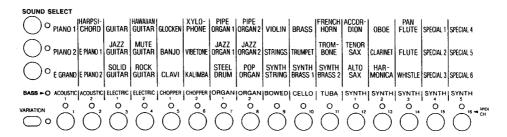

Play two measures of the polyphonic ACCOMP 1 pattern on the keyboard.



- Record the performance in C major for correct chord progressions during playback.
- Up to 4 notes can sound at the same time.
- Play the ACCOMP 1 pattern for two measures to store it. Then, as the two-measure pattern is repeated, you can play the keyboard to add notes to the pattern. The final version of the ACCOMP 1 pattern is the one that is stored.
- When the CLEAR button is pressed, the AC-COMP 1 part is completely erased.
- Adjust the tempo as necessary.
- If either QUANTIZE level is selected during recording, any unevenness in the timing of the performance is smoothed out. The default setting is A. (Refer to page 19.)

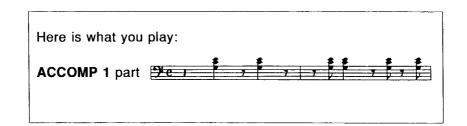

mZG--SI

V. Storing the ACCOMP 2/ACCOMP 3 parts

Press the **RECORD** button again. You can record the **ACCOMP 2** part and the **ACCOMP 3** part in the same manner as for the **ACCOMP 1** part.

 Up to 3 notes can sound at the same time from the combined ACCOMP 2 and ACCOMP 3 parts.



VI. Finish storing the rhythm

When all the parts to the pattern have been stored as desired, press the **RECORD** button of the **COMPOSER** once again to complete the storage operation.

• The **RECORD** button turns off, and the display returns to the tempo display.



About the QUANTIZE function

When you play the keyboard, your timing may not be exact, and that is the way it will be recorded and played back. However, when you record with the **QUANTIZE** function on, any unevenness in the timing of your performance is smoothed out.

For example, if you record the following music with the QUANTIZE level set to \mathfrak{z} :

 The QUANTIZE function also works for PITCH BEND. In order to store a smooth, continuous PITCH BEND, the QUANTIZE function must be off.

Storage capacity

Expressed in terms of notes, the total storage capacity of the **COMPOSER** is approximately 600 notes.

- When the remaining storage capacity becomes 50 notes or less, the display shows the number of notes which can be stored.
- When "0" is shown on the display and the "beep, beep, beep" error message sounds, no more data can be stored in the COMPOSER.


Editing a preset rhythm pattern

The editing feature of the **COMPOSER** allows you to modify any of the factory-preset rhythms or even your original rhythms, and then store the new patterns in the four **COMP** buttons.

- 1. Select the rhythm to be modified with the buttons in the **RHYTHM SELECT** matrix.
- 2. Press the **RECORD** button in the **COMPOSER** section.



 Press one of the COMP 1~4 buttons in which to store the modified rhythm pattern. The selected rhythm is now recalled. " A L L " appears on the display.



4. Press the RECORD button 1 to 5 times so that the indicator for the part you wish to edit is lit. For example, if you want to modify the BASS part, press the RECORD button two times.



- 5. You can clear the part and begin storing it from the beginning, or you can edit the part without clearing it.
- Press the CLEAR button ONLY if you wish to delete all of the pattern for the selected part and store a new pattern from the beginning.

6. If desired, use the **RECORD** button to select other parts to modify.



7. When you have completed making the modifications, press the RECORD button the number of times required for the RECORD button indicator to turn off. The modified version of the rhythm pattern is now stored in the specified COMP button.



■ Note regarding modification of preset rhythm patterns

Preset rhythms which are stored in the **COMP** buttons may have a somewhat different nuance from the original preset rhythms.


Play back the stored pattern

The rhythm pattern you stored in the **COMPOSER** is played back automatically while you specify the chords in the same manner as for the **AUTO PLAY CHORD**.

 Press the button in which the rhythm pattern is stored (one of the COMP 1~4 buttons in the RHYTHM SELECT matrix).

RHYTHM SELECT									
COMP	10	\bigcirc							
COMP	20	\bigcirc							
COMP	30	\bigcirc							
COMP	40	\bigcirc							

- The indicator lights.
- Press the ONE-FINGER button or FINGERED button of the AUTO PLAY CHORD to turn it on.




- The indicator lights.
- 3. Press the **ACCOMP PART 1**, **2** and **3** buttons to turn them on.



4. Press the START/STOP button.



- · The DRUMS pattern begins to play.
- 5. Specify the chord on the left part of the keyboard, and play the melody on the right part.

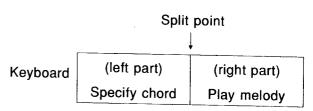

- The BASS and ACCOMP 1, 2 and 3 parts are played back in the chord you specify on the keyboard.
- To stop the rhythm pattern playback, press the START/STOP button.



The indicators light.

Notes:

- Select the keyboard split point with the KEY SPLIT button.
- You can turn off any of the ACCOMP PART buttons during playback if you do not wish the correponding part(s) to be played back.
- Adjust the volume of the BASS and ACCOMP PART 1, 2 and 3 with the corresponding BALANCE buttons. (Refer to Vol. 2, page 5.)

FILL IN, INTRO and ENDING patterns

- If a preset rhythm pattern was edited and stored in a COMP button, when the FILL IN or INTRO & ENDING button is pressed while the pattern is playing back, the FILL IN, INTRO or ENDING pattern corresponding to the original rhythm will sound.
- If the COMP button's memory is erased and a completely new pattern is stored, the FILL IN, INTRO and ENDING patterns that sound will be those of the rhythm which was selected immediately before beginning the recording procedure.

Outline of storing in the COMPOSER

1

OUANTIZE BEAT INSTR
O J 3/4 CLEAR ERASE RECORD
O J O O O

2

Press one of the COMP buttons (1~4) to turn it on.


RHYTHM SELECT
COMP 1 COMP 2 COMP 3 COMP 4 COMP 4 COMP


		COM	P 400				
	RECORD button	Display	Storable part	CLEAR button	QUANTIZE	BEAT	INSTR ERASE
3	RECORD	PLL	_	All parts erased	_	4/4 or 3/4	_
4	RECORD		DRUMS	DRUMS part erased	Select before storing.		Erase for each instrument.
5	RECORD O	b A 5	BASS	BASS part erased	Select before storing.		_
6	RECORD		ACCOMP 1	ACCOMP PART 1 part erased	Select before storing.	_	
7	RECORD'	AC2	ACCOMP 2	ACCOMP PART 2 part erased	Select before storing.	_	
8	RECORD O		ACCOMP 3	ACCOMP PART 3 part erased	Select before storing.	_	
9	RECORD O	(tempo)	_		_	_	_

Setting the functions

Tuning

With this function you can fine-tune the pitch of the entire instrument.





- The pitch is shown on the display.
- Press the two buttons at the same time to reset the pitch to 440.0 Hz.
- The pitch is adjustable within a range of 427.3 Hz to 453 Hz.
- The decimal display changes as follows: 0.3
 → 0.6 → 1.0.

PANEL MEMORY expanded mode (KN400)

You can set the range of panel settings which are stored in the **PANEL MEMORY** locations. In addition to the normal mode settings (refer to Vol. 2, page 8), the following settings are stored.

Vol. 2, page 8), the following settings are storable in the expanded mode:


- RHYTHM SELECT status
- Tempo
- TRANSPOSE status
- MANUAL PERCUSSION sound
- 1. Press the **SUB BALANCE/MIDI** button two times.



2. While "MIdI" is shown on the display, press either **TEMPO** button.



" P L 1 " is shown on the display.



3. In the **RHYTHM SELECT** matrix, press the third button from the right in the horizontal row to turn it on.

	ı	ł	ı				RHYTHM SELECT
MARCH 1	MARCH 2	COUNTRY	WALTZ	TANGO	LATIN 1	LÀTIN 2	COMP 1 O
BIG BAND	JAZZ COMBO 1	JAZZ COMB02	DIXIE	JAZZ WALTZ	SAMBA	BOSSA- NOVA	COMP 20
8 BEAT 1	8 BEAT 2	ROCK'N' ROLL	SHUFFLE	ROCK BALLAD	LATIN ROCK 1	LATIN ROCK 2	COMP 30
16 BEAT 1.	16 BEAT 2	JAZZ ROCK	FUNK	SWING ROCK	DISCO 1	DISC02	COMP 40
\bigcirc	\bigcirc	Ŏ	Ŏ	Ŏ	\bigcirc	Ö	VARIATION
					()		

4. Press the SUB BALANCE/MIDI button to turn it off.



Assigning a function to the foot switch

If the SZ-P1 foot switch (sold separately) is connected, the default function assigned to the foot switch is the rhythm start/stop; however, you can assign a different function to the foot switch.

Connection



 Press the SUB BALANCE/MIDI button two times.



2. While "MId" (KN200) or "MIdI" (KN400) appears on the display, use the **TEMPO**'s **SLOW** or **FAST** button to select "FUn" (function) on the display.



· The indicator flashes.

3. Use the **POLY** (KN200) or **POLY 1** (KN400) **BALANCE** buttons to assign the desired function to the foot switch.

Display	Function
SU5	Sustain on/off
GLd	Glide effect*
FEC	TECHNI-CHORD on/off
5 <i>L</i> -	START/STOP
F IL	FILL IN
End	INTRO & ENDING

*Glide effect: As long as the foot switch is depressed, the pitch of the pressed keyboard keys is lowered by a half-tone; when the foot switch is released, the pitch returns to normal.

The glide effect works for the following sounds: GUITAR, JAZZ GUITAR, SOLID GUITAR, ROCK GUITAR, MUTE GUITAR, HAWAIIAN GUITAR, BANJO, VIOLIN, BRASS, TRUMPET, SYNTH BRASS 1, 2, TROMBONE, FRENCH HORN, TENOR SAX, ALTO SAX, HARMONICA, CLARINET, PAN FLUTE, FLUTE, WHISTLE, SPECIAL 1, 2, 3, 5, 6

Press the SUB BALANCE/MIDI button to turn it off.



Modulation depth

■ KN200

You can set the vibrato depth for modulation data received through the MIDI terminals.

■ KN400

You can set the vibrato depth of this instrument's **MODULATION** control and for modulation data received through the MIDI terminals.

 The modulation depth can be set independently for each of these parts:

KN200: POLY

KN400: POLY 1, POLY 2, ACCOMP 1, 2, 3,

BASS

 Press the SUB BALANCE/MIDI button two times.




 While "MId" (KN200) or "MIdI" (KN400) appears on the display, use the TEMPO's FAST or SLOW button to display the desired part name on the display.



· The indicator flashes.

- 3. Use the **POLY** (KN200) or **POLY 1** (KN400) **BALANCE** buttons to adjust the vibrato depth.
- The settable range of the vibrato depth is 0~9.

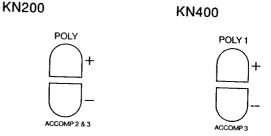

- The higher the number, the more pronounced the vibrato.
- 4. Repeat steps 2 and 3 to set the vibrato depth for the other parts.
- When the vibrato depth has been set for all the parts as desired, press the SUB BALANCE/ MIDI button to turn it off.

Initializing the function settings

■ KN200

When the keyboard is turned off, all of the stored memories of the **SEQUENCER** and settings for MIDI, the foot switch, etc. are erased and return to their factory-preset (initialized) status.


■ KN400

The various memory contents and settings of the **SEQUENCER**, **COMPOSER**, MIDI, foot switch, etc. remain in the internal memory of the instrument for about one week even after the **POWER** button is turned off. To reset all the memories and settings to their factory-preset status (initialized settings), follow the procedure below.

 Press the **POWER** button to turn off the instrument.



While depressing all three MANUAL PERCUS-SION buttons, press the POWER button to turn on the instrument.



What is MIDI?

MIDI (Musical Instrument Digital Interface) is the international standard for digital communication of electronic musical instrument data.

This means that any equipment which has a MIDI terminal—such as electronic musical instruments and personal computers—can easily exchange digital data with other MIDI equipment without resorting to complicated conversions or connections.

What can you do with MIDI?

Control another connected MIDI keyboard

By playing on one MIDI keyboard, you can produce a performance on one or more connected MIDI keyboards. If different sounds and effects are assigned to each keyboard, one person playing on one keyboard can produce an ensemble performance of many instruments. Another use would be to centrally control the sounds, effects and volumes of connected instruments on one keyboard.


Automatic performance on the keyboard

If performance data for a MIDI instrument is stored in a computer or MIDI sequencer, the stored data can be used for automatic performance of the MIDI instrument.

Synchronized performance

Play along with a connected MIDI sequencer or rhythm machine for a synchronized performance.

About the MIDI terminals

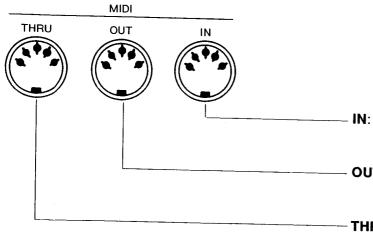

The terminal by which this instrument receives data from other equipment.

OUT: The terminal that transmits data from this instrument to other equipment.

THRU (KN400):

The terminal that transfers data from the **IN** terminal directly to other equipment.

For these connections, use a commercially available MIDI cable


The following kinds of data can be transmitted/received

- Keyboard key note (keyboard on/off) data
- Keyboard velocity data (KN200: receive only)
- Pitch bend data (KN400)
- Control change data
- modulation
- balance
- · main volume
- sustain
- · rhythm variation
- · fill in, intro & ending
- · digital celeste
- Program change data (sound for each part, and DRUMS instrument)
- Clock signal
- Start/stop data


Note: Data cannot be transmitted/received when the **DEMO**) button is on.

Connection examples

■ To generate sound from a connected instrument by playing this instrument



■ To generate sound from this instrument by playing a connected instrument



■ To generate sound from this instrument by operating a connected sequencer



Basic channel

There are 16 basic channels (1~16) for MIDI signals. The channels on the transmission side and receiving side must match before keyboard on/off data, sound data, effect data, etc. can be exchanged.

The default settings are as follows:

■ KN200

Part	Channel
POLY	1
BASS	3
ACCOMP 1	5
ACCOMP 2	9
ACCOMP 3	10
DRUMS	15
CONTROL	16

■ KN400

Part	Channel	
POLY 1	1	
POLY 2	4	
BASS	3	
ACCOMP 1	5	
ACCOMP 2	9	
ACCOMP 3	10	
DRUMS	15	
CONTROL	16	

Setting MIDI functions

Here is an outline of the procedures for setting the various MIDI functions:

L Enter the MIDI function-setting mode.

II. Set the functions for each part.

1. Select the part.

- 2. Set each function.
 - Basic channel
 - Local control

Repeat for each part.

Set the functions common to all parts.

- Receive mode
 - · Transmit mode
 - Program change mode
 - Note only
 - PANEL MEMORY program change (KN400)
 - MIDI clock
 - · START/STOP

Exit the MIDI function-setting mode.

I. Enter the MIDI function-setting mode

1. Press the SUB BALANCE/MIDI button two times.



 While "MId" (KN200) or "MIdI" (KN400) appears on the display, press either TEMPO button.



II. Set the functions for each part

■ Select the part

Select the part whose functions you wish to set first with the **TEMPO** buttons.

- The indication for the selected part will appear on the display.
- **■** Basic channel

In the **SOUND SELECT** matrix, use the horizontal row of buttons to select a channel $(1\sim16)$.


SOUND SELECT

 It is not necessary to set the functions for the CONTROL part, which is for transmitting/receiving MAIN VOLUME data. Basic channel 16 is automatically assigned for this part.

KN200

\bigcirc	0	PIANO 1	HARPSI- CHORD	GUITAR	HAWAHAN Guitar	GLOCKEN	XYLO- PHONE	PIPE ORGAN 1	PIPE ORGAN 2	VIOLIN	BRASS	FRENCH HORN	ACCOR-		PAN	CBCCIAI 1	SPECIAL 4
\bigcirc	0	PIANO 2	E PIANO 1	JAZZ GUITAR	MUTE GUITAR	BANJO	VIBETONE	JAZZ ORGAN 1	JAZZ ORGAN 2	STRINGS	TRUMPET	TROM- BONE	TENOR SAX				SPECIAL 5
() 'ARIATIO		E GRAND	E PIANO 2	SOLID GUITAR O	ROCK GUITAR O	CLAVI	KALIMBA I O	STEEL DRUM O	POP ORGAN	SYNTH STRING	BRASS 1	SYNTH BRASS 2	0	HAR-			SPECIAL 6
\bigcirc	0	\bigcirc	\bigcirc	\bigcirc	\bigcirc	\bigcirc	\bigcirc	\bigcirc	\bigcirc	\bigcirc		\bigcirc		13		()	O 16 ◀ MIDI

KN400

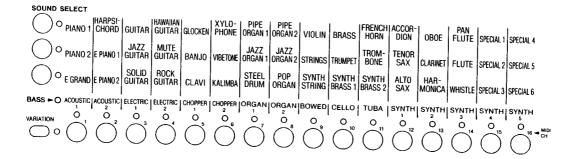

- Channel 16 is reserved for the CONTROL part, so select from channels 1~15.
- The same basic channel cannot be assigned to two or more parts. If you selected a channel which has already been set, an error beep sounds.

■ Local control

Specify, for each part, whether the performance played on this instrument's keyboard is output by this instrument's sound generator or not.

Local control on	Local control off
Notes play on this instrument's keyboard are output by this instrument's sound generator and are sent to the MIDI OUT terminal.	l ' - ' - ' - ' - ' - ' - ' - ' - ' - '

Set local control to on/off by using the VARIA-TION button.

KN200	KN400
SOUND SELECT	SOUND SELECT
O PIANO 1 HARPSI-	O PIANO 1 CHORD
O PIANO 2 E PIANO 1	O PIANO 2 E PIANO 1
© E GRAND E PIANO 2	O E GRAND E PIANO 2
VARIATION O O 2	BASS - O ACOUSTIC ACOUSTIC
	VARIATION 1 2

The lit VARIATION indicator means the local control on status.

Set the MIDI functions for each of the other parts.

III. Set the functions common to all parts

■ Receive mode

Set to the single mode when you wish to receive data using only one basic channel. Set to the multi mode when you wish to receive data on multiple channels.

Single mode (off)	Multi mode (on)
Performance data is received only for the basic channel assigned to the POLY (KN200) or the POLY 1 (KN400) part. The performance is controlled by this instrument's AUTO PLAY CHORD and CONDUCTOR (KN400) settings (the same as when you play this instrument's keyboard).	In this mode the KN200/KN400 is used as a sound generator, and data can be received independently for all sound parts for which a basic channel is assigned.

For example, select single or multi for the receive mode by using the leftmost button in the horizontal row of the **RHYTHM SELECT** matrix.

OII		ilgle i	noue		Oi		Wuiti	illoue
							RHYTHM	SELECT
MARCH 1	MARCH 2	COUNTRY	WALTZ	SWING 1	SWING 2	DIXIE	JAZZ WALTZ	\circ
8 BEAT 1	8 BEAT 2	ROCK'N' ROLL	SHUFFLE	ROCK BALLAD	LATIN 1	LATIN 2	BOSSA- NOVA	\circ
16 BEAT 1	16 BEAT 2	JAZZ ROCK	FUNK	SWING	DISCO	LATIN ROCK 1	LATIN ROCK 2	\circ
$\tilde{\bigcirc}$	Ŏ	Ŏ	Ŏ	Ŏ	Ŏ	Ŏ	Ŏ	O C
1								

 In multi mode, the maximum number of notes which can be generated for each part is as follows:

POLY*/POLY 1**	4 notes						
ACCOMP 1	4 notes						
ACCOMP 2	3 notes						
ACCOMP 3							
BASS	1 note						
DRUMS	4 notes						

^{*}KN200 **KN400

■ Transmit mode

You can send data for the automatic accompaniment pattern of the AUTO PLAY CHORD.

APC mode (on)	Chord mode (off)
The AUTO PLAY CHORD's ACCOMP and BASS patterns which are formed by playing chords on this instrument's keyboard are transmitted as performance data.	The chord data is transmitted exactly as the chords

■ Program change mode

You can match the sound change data when transmitting/receiving between different Technics instruments.

Normal (off)	Technics (on)
The program change numbers correspond to the order of the sounds as they are lined up from the leftmost sound of the bottom row and beginning with 1. The KEYBOARD PERCUSSION instrument sounds correspond to the Keyboard's key note numbers.	Program change numbers are standardized among all Technics models which are set to this mode: the program change number assigned to a given sound on one model is assigned to the same sound on all models in the same mode. The KEYBOARD PERCUSSION instrument types correspond to the same key note numbers for connected Technics models set to this mode.

■ NOTE ONLY

Of the state of th	off
of the channel voice message, only note on/off and all-note-off data is transmitted/received.	All channel voice message data used in the KN200/KN400 can be transmitted/recieved.
	i anomitod/recieveu.

■ PANEL MEMORY program change (KN400)

: 0ge (1.11-100)		
Enable (on)	Disable (off)	
You can transmit/receive program change data from the PANEL MEMORY buttons 1~4 through the POLY 1 basic channel.	Vou connect to	

■ MIDI clock

Internal clock (off)	External clock (on)
the connected instruments of the	This instrument's BUVTUR

■ START/STOP

Enable (on)	Disable (off)						
RHYTHM and SEQUENCER start/stop data are received/transmitted.	RHYTHM and SEQUENCER start/stop data are not received/transmitted.						

Set the on/off status of each of the above modes by using the buttons in the horizontal row of the **RHYTHM SELECT** matrix.

 In the modes described above, the "on" and "off" indications refer to the corresponding button's on/off status.

KN200)								KN40	0									
						i	RHYTH	A SELECT									RHYTH	IM SELEC	т
MARCH 1 M	IARCH 2	COUNTRY	WALTZ	SWING 1	SWING 2	DIXIE	JAZZ WALTZ	\circ	MARCH 1	MARCH	2 CO	UNTRY	WALTZ	TANGO	LATIN 1	LATIN 2	СОМР	10(
8 BEAT 1 8	BEAT2	ROCK'N' ROLL	SHUFFLE	ROCK BALLAD	LATIN 1	LATIN 2	BOSSA- NOVA	\circ	BIG BAND	JAZZ COMBO	1 CC	IAZZ IMB02	DIXIE	JAZZ WALTZ	SAMBA	BOSSA- NOVA	COMP	20)
16 BEAT 1 16			FUNK	SWING ROCK	DISCO			\circ	8 BEAT 1	8 BEAT		OCK'N' ROLL	SHUFFLE	ROCK BALLAD	LATIN ROCK 1	LATIN ROCK 2	COMP	30€	
	$\mathring{\bigcirc}$	$^{\circ}$	$^{\circ}$	$^{\circ}$	$^{\circ}$	$^{\circ}$	$^{\circ}$	VARIATION	16 BEAT 1 O	16 BEAT	[2] F	JAZZ ROCK	FUNK O	SWING ROCK O	DISCO 1	DISCO 2	COMP	_	
Receive	- 1	rogra				BR	HRO & EAK S	START/STOP O	Ŏ	Ğ) (Ŏ	Ŏ	Ŏ	Ŏ		Č	VARIA	O O
mode		hang node	е					$\overline{}$	Recei mode	- 1		ogra ange	- 1	PANE MEM			CHRO & REAK O	START/S	TOP
	ansr ode	nit	Note	only	1	MIDI	clock	Start/stop				ode		progr chan	am		7	\Box	
111	ouc								Т	rans	mi	t _l	Note	only	_	MIDI	clock	< Sta	rt/stop
									n	node					•				

IV. Exit the MIDI function-setting mode.

When you have finished making all the settings, press the **SUB BALANCE/MIDI** button to turn it off.



Keyboard

MIDI Implementation Chart

[SX-KN200/SX-KN400]

(Transmitted)

Fun	ction	POLY (KN200)/ POLY 1 (KN400)	POLY 2 (KN400)	ACCOMP 1	ACCOMP 2	ACCOMP 3	BASS	DRUMS	CONTROL	Remarks
-40.0	Default	1~16	1~16	1~16	1~16	1~16	1~16	1~16	1~16	memorized
Channel	Changed	1~16	1~16	1~16	1~16	1~16	1~16	1~16	1~16	
Mode	Default	3	3	3	3	3	3	3	3	OMNI OFF POLY MODE
	Messages	×	×	×	×	×	×	×	×	
	Altered	_		_	_	_			<u> </u>	
Note		31~102	31~102	31~102	31~102	31~102	31~102	36~69**	<u> </u>	Changes depending
Number	True voice		_		_					on the position of the transpose contro
/alaait	Note ON	× (KN200) ○ (KN400)	× (KN200) ○ (KN400)	× (KN200) ○ (KN400)	× (KN200) ○ (KN400)	× (KN200) ○ (KN400)	× (KN200) ○ (KN400)	× (KN200) ○ (KN400)		
elocity/	Note OFF	× (9nH:v=0)	× (9nH:v=0)	× (9nH:v=0)	× (9nH:v=0)	× (9nH:v=0)	× (9nH:v=0)	× (9nH:v=0)	_	
After	Key's	×	×	×	×	×	×	×	×	
Fouch	Ch's	×	×	×	×	×	×	×	×	
Pitch Bend	ler	× (KN200) ○ (KN400)	× (KN200) ○ (KN400)	× (KN200) ○ (KN400)	× (KN200) ○ (KN400)	× (KN200) ○ (KN400)	× (KN200) ○ (KN400)	×	×	
	1	× (KN200) ○ (KN400)	× (KN200) ○ (KN400)	× (KN200) ○ (KN400)	× (KN200) ○ (KN400)	× (KN200) ○ (KN400)	× (KN200) ○ (KN400)	×	×	modulation
	7	0	0	0	0	0 (1114-00)	(KI1400)	0	×	volume
	64	0	0		×	×	0	×	×	sustain
	80	×	×	0	×	×	×	×	×	auto play chord
Control Change	82	×	×	×	×	×	×	0	×	intro & ending, fill in
•	93	0		×	×	×	×	×	×	chorus
Prog		0	0	0	× (KN200) ○ (KN400)	× (KN200) ○ (KN400)	0	0	×	
Change	True #	_		_	_			_	_	
System ex	clusive				_l	×	1		-1	
	Song Pos	-				×				
System common	Song Sel					×				
oommion	Tune					×				
System	Clock					0				
Real Time						0 ×				start/stop, continue
	Local ON/OFF		×	×	Tx	×	×	×	1 _	Clarifotop, continuo
Aux	All notes OFF		0		0	0	0	Ô		
Messages	Active Sense					0	1	1	<u> </u>	
	Reset	•				×				
Notes	Reset			hether or n	not the data	for each o				

Mode 1: Mode 3: OMNI ON, POLY

OMNI OFF, POLY

Mode 2:

OMNI ON, MONO

Mode 4:

OMNI OFF, MONO

○: Yes ×: No

Keyboard [SX-KN200/SX-KN400]

MIDI Implementation Chart

(Recognized)

Fı	unction	POLY (KN200)/ POLY 1 (KN400)	ACCOMP 1	ACCOMP 2	ACCOMP 3	BASS	DRUMS	CONTROL	Remarks
Basic	Default	1~16	1~16	1~16	1~16	1~16	1~16	1~16	memorized (KN40
Channel	Changed	1~16	1~16	1~16	1~16	1~16	1~16	1~16	memorized (KI440)
	Default	3	3	3	3	3	3	3	OMNI OFF POLY MOI
lode	Messages	×	×	×	×	×	×	×	O I FOL MOI
	Altered						_	_	
lote		0~127	0~127	0~127	0~127	0~127	36~69***	_	Change
lumber	True voice	36~119	36~119	36~119	36~119	24~107	36~69	_	Changes depending on the sound.
elocity	Note ON	0	0	0	0	0	0	_	
	Note OFF	×	×	×	×	×	×		
After	Key's	×	×	×	×	×	×	×	
ouch	Ch's	×	×	×	×	×	×		
Pitch Ben	der	0	0	0				×	
	1				0	0	×	×	
	7	0	0	0	0	0	×	×	modulation
		0	0	0	0	0	0	×	volume
	64	0	0	0	0	0	×	×	sustain
ontrol	80	×	0	×	×	×	×	×	auto play chord
hange	82	×	×	×	×	×	0	* ×	intro & ending, fill i
	93	0	×	×	×	×	×	×	chorus
rog hange		0~47	0~47	0~47	0~47	0~15	0~23 (KN200)		
	True #	0~3** (KN400)					0~31 (KN400)	i	
stem ex	clusive				×		<u> </u>		
/stem	Song Pos				×				
ommon	Song Sel				×				
	Tune				×				
stem	Clock				0				
eal Time	Commands			-4					
	Local ON/OFF	×	×	×	* O ×	×			start/stop, continue
ıx essages	All notes OFF	0	0	0	ô	0	×	_	1
.33aye3	Active Sense				0				
	Reset				×				
tes							ms is transmit		

Mode 1:

OMNI ON, POLY

Mode 3: OMNI OFF, POLY

Mode 2:

OMNI ON, MONO

Mode 4:

OMNI OFF, MONO

O: Yes

×: No